

JTLS-GO

Version Description Document

July 2017



DEPARTMENT OF DEFENSE
JOINT STAFF J7
116 LAKE VIEW PARKWAY
SUFFOLK, VA 23435-2697

JOINT THEATER LEVEL SIMULATION - GLOBAL OPERATIONS
(JTLS-GO 5.0.7.0)

[Blank Page]

ABSTRACT

The Joint Theater Level Simulation - Global Operations (JTLS-GO[®]) is an interactive, computer-based, multi-sided wargaming system that models combined joint and coalition resource air, land, naval, and Non-Governmental Organization (NGO) environments.

This *JTLS-GO Version Description Document (VDD)* describes the new features of the Version 5.0.7.0 delivery of the configuration-managed JTLS-GO software suite.

JTLS-GO 5.0.7.0 is a Maintenance release of the JTLS-GO 5.0 series that includes an updated SBDKOR50 Standard Database, as well as minor model functionality changes implemented as Engineering Change Proposals (ECPs), which are summarized in Chapter 2. Code modifications that represent corrections to known Software Trouble Reports (STRs) are described in Chapter 3. Remaining and outstanding STRs are described in Chapter 4.

This publication is updated and revised as required for each Major or Maintenance version release of the JTLS-GO model. Corrections, additions, or recommendations for improvement must reference specific sections, pages, and paragraphs with appropriate justification and be forwarded to:

JTLS-GO Development Team Leader
ROLANDS & ASSOCIATES Corporation
120 Del Rey Gardens Drive
Del Rey Oaks, California 93940 USA
jtlsdev@rolands.com

Copyright 2017 - ROLANDS & ASSOCIATES Corporation - All Rights Reserved

[Blank Page]

TABLE OF CONTENTS

ABSTRACT	iii
1.0 INTRODUCTION.....	1-1
1.1 SCOPE	1-1
1.2 INVENTORY OF MATERIALS	1-1
1.2.1 Unchanged Documents	1-1
1.2.2 Updated Documents	1-2
1.2.3 Delivered Software Components	1-2
1.2.4 Released Databases	1-4
1.3 INTERFACE COMPATIBILITY	1-4
1.3.1 Support Software	1-4
1.3.2 JTLS-GO High Level Architecture Compliance	1-7
1.4 DATABASE MODIFICATIONS	1-8
1.4.1 JTLS-GO Using Legacy Default Symbol Set	1-8
1.4.2 Upgrading JTLS-GO Default Symbol Set	1-8
1.4.3 Standard Database Changes	1-9
1.5 INSTALLATION	1-9
1.5.1 Installation Instructions	1-9
1.5.2 Oracle Compatibility and Installation	1-9
1.5.3 Disabling Certificate Authority	1-10
1.5.4 Map Vector File Format Update	1-11
2.0 ENGINEERING CHANGE PROPOSALS.....	2-1
3.0 SOFTWARE TROUBLE REPORTS.....	3-1
3.1 JTLS-2017-13234 GIS Tool Export Null Pointer Exception	3-1
3.2 JTLS-2017-13235 Ground Unit Move Task Shows Unusual Strength	3-1
3.3 JTLS-2017-13236 CEP Crashed After Faction Side Change	3-1
3.4 JTLS-2017-13237 Set Air General Parameter Order Incorrect Value	3-2
3.5 JTLS-2017-13238 Route Optimization Parameter Missing UOM	3-2
3.6 JTLS-2017-13239 JODA Crash While Using Find in Console	3-2
4.0 REMAINING ERRORS.....	4-1
4.1 DDSC – TMU Line Mode Changes Multiple Grids	4-1
4.2 DDSC – Multiple Types In DDS History Table	4-1
4.3 WHIP - Pipeline Not Shown On IMT	4-1
4.4 DDSC/WHIP/JOBE - CADRG Map Zoom	4-1
4.5 WSM - Many Messages Cause Lockup	4-1
4.6 Strategic Airlift Does Not Work	4-1
4.7 Tactical Ground Formation Attacks Do Not Work	4-1
4.8 Materiel Handling Equipment (MHE) Does Not Work	4-2
4.9 Port Amphibious Operations Do Not Work	4-2
4.10 Multiple Point Ground Group Move Results Not Consistent	4-2

ABBREVIATIONS AND ACRONYMS A-1

Version 5.0.7.0 STANDARD DATABASE CHANGES B-1

Version 5.0.7.0 DATABASE CHANGES C-1

1.0 INTRODUCTION

1.1 SCOPE

This *JTLS-GO Version Description Document* (VDD) describes Version 5.0.7.0 of the configuration managed Joint Theater Level Simulation - Global Operations (JTLS-GO[®]) software suite. JTLS-GO 5.0.7.0 is a Maintenance delivery for the JTLS-GO 5.0 series of releases.

JTLS-GO 5.0.7.0 includes the entire JTLS-GO suite of software and the SDBKOR50 Standard Database that supports a realistic scenario based on the current Korean Peninsula theater of operations. Database modifications that were accomplished to upgrade the previous JTLS-GO Standard Database to this current version are summarized in this chapter, as well as [APPENDIX B](#). Detailed descriptions of minor Engineering Change Proposals (ECPs) implemented for this release are provided in [Chapter 2.0](#).

JTLS-GO 5.0.7.0 executes on the Red Hat Enterprise Linux Version 6 64-bit operating systems. The Web-Hosted Interface Program (WHIP[®]) user workstation interface can be executed on any operating system from any Java-compatible Web browser.

1.2 INVENTORY OF MATERIALS

This section lists documents and software that are relevant to JTLS-GO. All JTLS-GO documents included in this delivery are provided in PDF format within a documents subdirectory.

1.2.1 Unchanged Documents

JTLS-GO 5.0.7.0 is a bug release of the JTLS-GO system. Other than date changes, the following documents have had no significant changes since the last release of JTLS-GO.

- *JTLS-GO Analyst Guide* (JTLS-GO Document 01, Version 5.0.7.0)
- *JTLS-GO Air Services User Guide* (JTLS-GO Document 03, Version 5.0.7.0)
- *JTLS-GO Controller Guide* (JTLS-GO Document 04, Version 5.0.7.0)
- *JTLS-GO Data Requirements Manual* (JTLS-GO Document 05, Version 5.0.7.0)
- *JTLS-GO DDS User Guide* (JTLS-GO Document 06, Version 5.0.7.0)
- *JTLS-GO Director Guide* (JTLS-GO Document 07, Version 5.0.7.0)
- *JTLS-GO Executive Overview* (JTLS-GO Document 08, Version 5.0.7.0)
- *JTLS-GO Installation Manual* (JTLS-GO Document 09, Version 5.0.7.0)

- *JTLS-GO WHIP Training Manual* (JTLS-GO Document 10, Version 5.0.7.0)
- *JTLS-GO Player Guide* (JTLS-GO Document 12, Version 5.0.7.0)
- *JTLS-GO Standard Database Description* (JTLS-GO Document 14, Version 5.0.7.0)
- *JTLS-GO Technical Coordinator Guide* (JTLS-GO Document 16, Version 5.0.7.0)
- *JTLS-GO Entity Level Server User Guide* (JTLS-GO Document 19, Version 5.0.7.0)
- *JTLS-GO Federation User Guide* (JTLS-GO Document 20, Version 5.0.7.0)
- *JTLS-GO C4I Interface Manual* (JTLS-GO Document 21, Version 5.0.7.0)

1.2.2 Updated Documents

The following documents have been changed or improved since the last release of JTLS-GO.

- *JTLS-GO Software Maintenance Manual* (JTLS-GO Document 15, Version 5.0.7.0)
- *JTLS-GO Version Description Document* (JTLS-GO Document 17, Version 5.0.7.0)

1.2.3 Delivered Software Components

JTLS-GO 5.0.7.0 may be delivered either on a CD or as a set of compressed TAR files to be downloaded. Either method includes the complete suite of software executable code and command procedures. The following software components are included with this release:

- Combat Events Program (CEP)
- Scenario Initialization Program (SIP)
- Interface Configuration Program (ICP)
- Reformat Spreadsheet Program (RSP)
- Database Development System (DDS)
- JTLS Symbols Application (JSYMS)
- ATO Translator Service (ATOT)
- ATO Generator Service (ATOG)
- ATO Retrieval Program (ATORET)
- JTLS Convert Location Program (JCONVERT)

- Count Critical Order Program (CCO)
- JTLS HLA Interface Program (JHIP)
- After Action Review Client (AARC)
- Scenario Data Client (SDC)
- Order Entry Client (OEC)
- Order Verification Tool (OVT)
- JTLS Object Distribution Authority (JODA)
- Web Services Manager (WSM)
- Web Services
 - Apache Server (APACHE), version 2.4.26
 - JTLS XML Serial Repository (JXSR)
 - Order Management Authority (OMA)
 - Synchronized Authentication and Preferences Service (SYNAPSE)
 - XML Message Service (XMS)
- Web-Hosted Interface Program (WHIP)
- Total Recall Interactive Playback Program (TRIPP)
- Entity Level Server (ELS)
- JTLS Operational Interface (JOI) OTH-Gold, Link-16, and TACELINT
- KML Operational Interface (KOI)
- JTLS Transaction Interface Program (JTOI) supporting
 - ICC 2.8.2 and 3.0.2
 - NEC-CCIS
 - TBMCS
- JTLS Interface Network Navigator (JINN)
- JTLS Order of Battle Editor (JOBE)

- Database Configuration Program (DCP)
- DDS User Interface (DDS)
- JTLS Terrain Building Program

Instructions for installing JTLS-GO 5.0.7.0 are provided in the *JTLS-GO Installation Manual*. Installing a previous version of JTLS prior to installing JTLS-GO 5.0.7.0 is not necessary. No other upgrade beyond installation of the compressed TAR files (or CD) is required. The software provided with this delivery is a complete release that includes all files and code required to execute JTLS-GO.

1.2.4 Released Databases

This release includes the following sample unclassified databases:

- The scenario developed as the Korea Standard Database and named SDBKOR50 is a large-scale, seven-sided scenario database reflecting the approximate starting positions of units involved in the Korea Peninsula theater of operations. This example scenario was developed using unclassified data sources and is consequently not completely accurate. Discrepancies among actual units and their locations are not detrimental to the intended purpose of this database, which is to provide a recognizable and realistic scenario that demonstrates the simulation capabilities and supports JTLS training.
- The scenario DEMSDBKOR50, which is a reduced version of SDBKOR50, has also been updated.
- The scenario blank50 is the SDBKOR50 database with all force structure data removed, which can be used as a framework for building your customized database.

1.3 INTERFACE COMPATIBILITY

1.3.1 Support Software

JTLS-GO 5.0.7.0 requires the following versions of support software, including operating systems, compilers, scripting utilities, database tools, transfer protocols, and display managers.

- Operating system for the model: Red Hat Linux Enterprise Edition Version 6.9 (ES), 64-bit architecture.

Security Enabled (SE) Linux must not be enabled on systems used to execute JTLS-GO or its components. Tests reveal that SE Linux-enabled systems cause frequent and random JXSR crashes and errors. Use of SE Linux to support JTLS-GO is currently not authorized.

A RedHat Linux documented loop-back interface problem continues to cause degraded performance issues on Red Hat/CentOS 6 systems. This issue negatively impacts JTLS services when executed on the same server as Apache.

While we expect Red Hat to eventually correct this issue, significant effort has been placed on JTLS-GO optimization to minimize impact of the problem. Still we recommend users with more than 25 concurrent WHIP/TRIPP users to avoid this Red Hat/CentOS loopback issue by running Apache and the SYNAPSE on different physical or virtual servers. For users with significantly more than 25 concurrent WHIP/TRIPP users, consider not running other JTLS services, such as the JXSR and XMS, on the same server used by Apache.

See the *JTLS-GO Installation Manual*, Appendix D for some recommended system tuning changes that can mitigate these performance issues.

STR JTLS-2017-13229 implements SSH Tunneling between Apache and the services and among the services. While testing has been conducted in the development environment, rigorous testing should be done prior to use in any exercise. Particular attention should be paid to network performance under load.

When using a Linux system as a client, if a dialog saying “Too many open files” appears, see the *JTLS-GO Installation Manual*, Section 5.5 for a work around. If this occurs on a server, see the *JTLS-GO Installation Manual*, Appendix D.

JTLS-GO 5.0 has been tested with the following versions of Linux 6:

RedHat Linux 6 - this operating system license must be purchased.

Oracle Linux 6 - this is a free and distributable version of Linux which has been approved for use by U.S. Government agencies by the Defense Information Systems Agency (DISA).

CentOS 6 - a free version of Linux 6 that has not been approved by DISA for use by U.S. Government agencies.

- There are no restrictions on the operating system for client workstations, except that the operating system must have a Java-enabled web browser. JTLS-GO 5.0.7.0 has been tested on the following operating systems:

Red Hat Linux Enterprise Edition Version 5 and 6.

CentOS Linux Version 5 and 6.

Windows Vista, Windows 7, and Windows 10 can be used only if the workstation is an external HTTP client of the simulation network.

- Java 8 Update 141 is required for all platforms and must be used to support all workstations.

Because of recent incidents of intrusions into software systems, the United States Department of Defense (DoD) has implemented a strong and strictly enforced Information Assurance (IA) program. JTLS, as software that executes on DoD systems, must comply to the mandates of the IA program, along with all of the third party software used by JTLS-GO, such as Oracle and Java.

One of the DoD IA requirements is that the software must implement a methodology that ensures that the end user keep the software up-to-date and all security patches are properly installed. Java 8 has fulfilled this mandate by implementing an expiration date for its software. After a certain date, all Java related programs will stop working, whether you are connected to an open network or not.

JTLS-GO software releases are linked to the Java 8 security updates to meet this requirement. This version of JTLS-GO is released using Java 8 Update 141, which expires on 17 October 2017. A new version of JTLS-GO will be released prior to that expiration date.

- JTLS-GO database tools require use of a certified Oracle database server and the full Oracle Client installation for runtime requirements. Refer to [Section 1.5.2](#) of this chapter for additional installation details.
- Windows software, X11R5 server, Motif 1.2 Library, Motif Window Manager: These items are included as part of the supported versions of Red Hat Linux ES.
- TCP/IP is required for inter-process communication between the JODA data server and all user interface programs. The version of TCP/IP included with the supported versions of Red Hat Linux ES is sufficient.
- The Perl script language is used by the JTLS-GO system and game setup scripts. The version of Perl included with the supported versions of Red Hat Linux ES is sufficient. The Perl program is typically located in the /usr/bin directory. If Perl is installed in a another location, a link should be created from the /usr/bin directory to this program.
- SIMSCRIPT II.5 (SIMSCRIPT to C) translator/compiler: SIMSCRIPT is required for recompiling JTLS-GO code. It is not necessary to have a SIMSCRIPT compiler to execute JTLS-GO, because all JTLS-GO software executables are statically linked with the SIMSCRIPT libraries. The compiler is needed only if you are a U.S. Government organization that can obtain source code and plan to re-compile JTLS-GO SIMSCRIPT code. To obtain a SIMSCRIPT compiler, contact CACI Inc.

- ANSI C Compiler: It is not necessary to use a C compiler to execute JTLS-GO. This compiler is used only by U.S. Government organizations that can obtain source code and intend to re-compile any of the JTLS-GO component programs. The C Compiler version delivered with the supported versions of Red Hat Linux ES is sufficient.
- C++ Compiler: It is not necessary to use a C++ compiler to execute JTLS-GO. This compiler is used only by U.S. Government organizations that can obtain source code and intend to re-compile any of the JTLS-GO HLA component programs. The C++ Compiler version delivered with the supported versions of Red Hat Linux ES is sufficient.
- The JTLS-GO DDS (Database Development System) application uses these open source libraries:

JFreeChart, licensed under LGPL (GNU LESSER GENERAL PUBLIC LICENSE) by Object Refinery Limited, <http://www.object-refinery.com>

JCommon, licensed under LGPL2.1 (GNU LESSER GENERAL PUBLIC LICENSE version 2.1 or later) by Object Refinery Limited, <http://www.object-refinery.com>

Commons-math3-3.0.jar, licensed under Apache Software Foundation (Apache License, Version 2.0) <http://www.apache.org/licenses/LICENSE-2.0>HLA Compliance

- KML Operational Interface (KOI)

The Keyhole Markup Language (KML) Operational Interface (KOI) server utility enables the model to feed operational simulation data to any version of Google Earth™. The display capabilities and data transfer features of this terrain viewer are sufficiently robust to be used as a base-level operational interface. Operational Players who may be restricted from using the COP, C2PC, or other C4I systems may be able to install and use Google Earth and configure the KOI to provide a capability that resembles C4I for observing perception Force Side data.

Chapter 3 of the *JTLS-GO C4I Interface Manual* describes requirements and procedures for using the KOI capabilities.

1.3.2 JTLS-GO High Level Architecture Compliance

The JTLS-GO 5.0.7.0 release is fully High Level Architecture (HLA) compliant, and includes all the programs required to run JTLS-GO in an HLA mode. JTLS-GO has moved to a new Federation Object Model (FOM) located in the \$JGAME/data/hla directory. Federation testing of JTLS-GO is not complete, but initial tests with CAE's Gefechts Simulation (GESI) have been accomplished. Future plans include expanding the capabilities of the JTLS-GO-GESI federation, called GlobalSim continue.

GlobalSim is a comprehensive constructive simulation solution for joint training and wargaming that helps commanders and all levels of staff prepare for a range of operational scenarios. The

solution combines JTLS-GO with CAE's GESI constructive tactical entity-level simulation system as a federation called GlobalSim. CAE's GESI constructive simulation system is designed to run complex and comprehensive exercises from the company level up to division level. The CAE GESI system is used to represent a virtual battlefield, including weapons, vehicles, aircrafts, ground forces and more. Combining JTLS-GO and GESI brings together operational and tactical level constructive simulations to prepare commanders and staff to make timely, informed and intelligent decisions across the full spectrum of operations, including conventional combat, disaster relief, and operations other than war.

From the JTLS-GO perspective, all software needed to run GlobalSim is included in this delivery.

The HLA RTI (Run Time Infrastructure) executive program (rtiexec) recommended for use with this release is RTI-NG-Pro-v7.0 or Pitch pRTI Evolved 4.4.2.0. However, these programs are not included in the JTLS-GO 5.0.7.0 delivery. Users may obtain a full installation package of the RTI software from either vendor: Raytheon Company (<http://www.raytheon.com>) or Pitch Corporation (www.pitch.se). For information about executing the HLA RTI Executive and other HLA-related software, refer to the appropriate HLA documentation and user guides.

1.4 DATABASE MODIFICATIONS

No database structure differences exist between JTLS-GO 5.0.7.0 and JTLS-GO 5.0.0.0.

Significant database structure differences exist between JTLS-GO 5.0.7.0 and any previous 4.1 series database.

To upgrade your JTLS 4.1 scenario to JTLS-GO 5.0 compatibility, see instructions listed in the *JTLS-GO DDS User Guide*, Chapter 3.1.

1.4.1 JTLS-GO Using Legacy Default Symbol Set

Prior to unloading your newly upgraded JTLS-GO 5.0.0.0 formatted data from your Oracle database server into a JTLS-GO 5.0.0.0 scenario ASCII file, you must execute the JSYMS program, which will reorganize the structure of the .gs and .scf symbols-related files. See the *JTLS-GO DDS User Guide*, Appendix B.11 for instructions.

1.4.2 Upgrading JTLS-GO Default Symbol Set

The JTLS-GO Default Symbol Set delivered with this release has been modified to use the US 2525C symbol standard and well as the NATO Joint Military Symbol [APP-6(c)] standard. If you choose to propagate this new Default Symbol Set to any of your scenarios that use the 4.1 Default Symbol Set, see the *JTLS-GO DDS User Guide*, Appendix B.12 and B.13 for instructions.

You should not make any modifications to the Default Symbol Set, but you are free to copy the Default Symbol Set and create your own set to meet your needs.

1.4.3 Standard Database Changes

Additional Standard Database changes that are applicable to JTLS-GO 5.0.7.0 are described in [APPENDIX B](#).

1.5 INSTALLATION

1.5.1 Installation Instructions

The *JTLS-GO Installation Manual*, included in the compressed TAR file that is part of this JTLS-GO delivery, provides detailed instructions for installing a new version of JTLS-GO. The *Installation Manual* can be found in the `/documents` subdirectory of the JTLS-GO TAR file.

With the JTLS-GO 5.0 series, there have been significant changes to the directory structure which holds the files for the Online Player Manual (OPM). Users must remove all existing files from their JTLS 4.1 or earlier version `$JGAME/{scenario}` directory before setting up their scenario for execution with the JTLS 5.0 series. Prior to running Option 3 - "Setup System for a Specific Scenario" of the JTLS-GO menu, all users must remove the existing files in their scenario game directory. Failure to clean-up the `$JGAME/scenario` directory will result in a program crash while generating the OPM (Option 4).

The JDS Protocol has changed with this release. Any users that hook to the JODA or EODA to get information on the existence and/or status of objects must recompile their code with the new JDSP header files, and link with the new JDSP libraries. Within the protocol, a force side has been added to all AAR objects, The BE Facility object has been assigned a `damage_percent` attribute, and BE Objects have been added to link targets and units to a BE Facility.

1.5.2 Oracle Compatibility and Installation

A full Oracle Client installation (not Instant Client) that matches your database server version is currently a requirement for running some JTLS-GO applications. The Oracle Instant Client is not sufficient for JTLS-GO applications because Oracle utilities, such as `sqlldr`, `imp`, `exp`, `tnsping`, etc., are missing. If you have applied a patchset to your database server, the same patchset should be applied to the Oracle Client installation. A 64-bit Oracle Client installation must be used. The JTLS-GO scenario/database modification process also expects Oracle 11.2.0.1 or higher full Oracle Client installation.

Some sites NFS mount their database server as Oracle Client; other sites prefer a full install of the Oracle Client to a different directory that mounts (simple NFS will suffice) to JTLS-GO. Your system administrator can choose the appropriate installation. Assigning the full Oracle Client installation location (or mount point) as the `ORACLE_HOME` in the JTLS `.cshrc` file allows connecting to an Oracle database server (11.2.0.1 or higher - including 11gR2 XE) running on any Oracle-certified database server platform.

The new DDS application utilizes the Oracle GlassFish J2EE server, which, like the JTLS-GO WHIP Apache server, is delivered with JTLS and requires no separate installation.

Refer to Chapter 6 of the *JTLS-GO Installation Manual* for additional details pertaining to the Oracle installation.

1.5.3 Disabling Certificate Authority

Industry standard programming practices strongly recommended that Web Start technologies be signed by a Certificate Authority (CA) to validate that an application being run comes from a trusted and registered source under the PKI. Keeping with high security standards, R&A has opted to sign its web enabled applications with a certificate from the COMODO, which uses the Public Key Infrastructure (PKI) to validate the digital signature. Local area networks, intra-nets and standalone systems that have no outside connection to the Internet must configure their installation to disable certificate revocation checks. If this step is not taken under a closed environment, the JTLS-GO web-enabled applications will experience a significant delay in start up while the PKI attempts to validate the certification on COMODO's servers via the Internet.

The following outlines the method that should be used to turn off certificate revocation checks. Again, this step should only be taken if the WHIP, TRIPP and/or DDS are going to be run in a closed environment.

Bring up the Control Panel. On Linux, typing 'jcontrol' in a terminal window will bring up the configuration panel. On Windows, go to the Windows 'Control Panel', select 'Programs' then click on 'Java'. Both Linux and Windows will display the same configuration panel.

Navigate to the 'Advanced' tab and in the list of configuration options, select the 'Do not check' radio button and click 'OK'. The image below illustrates the corresponding selection in the Control Panel.

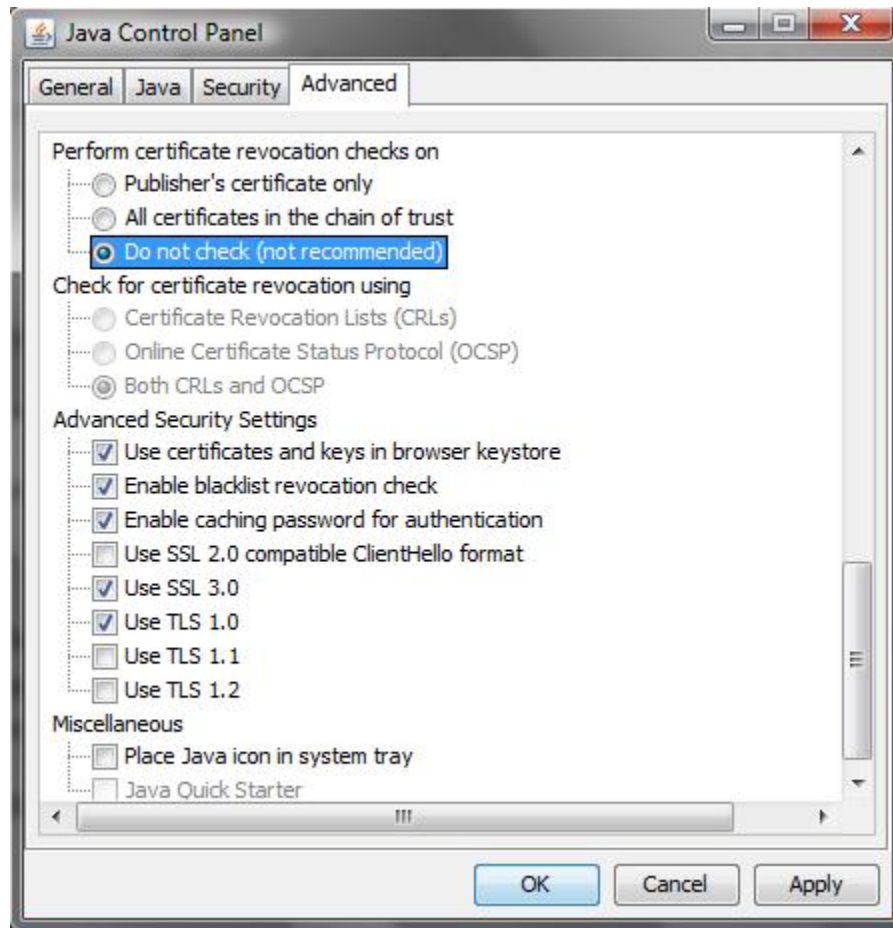


Figure 1.1 Control Panel

Completing this step will allow you to run the JTLS-GO web enabled applications without any external checks and launch the application without the validation delay.

1.5.4 Map Vector File Format Update

The format of the files used to display outline maps on the WHIP and DDSC has changed. Files in the new format are delivered with JTLS-GO. The files are located in `$JTLSHOME/data/maps/vector` and are in XML format.

For users who desire to use any custom files that are in the JTLS 4.1 format, a conversion script called "outlineConverter" is provided. The script can either convert individual files or a directory of files. The user can also choose to convert all types of outlines or only the shoreline outline (coded 9999 in the 4.1 format).

The script has 2 usages:

- To convert a single file:

```
outlineConverter -a <map_file> [-c shoreline]
```

- To convert all files in a directory. The file extension is assumed to be .map.

```
outlineConverter -d <directory> [-c shoreline]
```

The optional “-c shoreline” argument causes only the shoreline vectors to be converted. Rivers and national boundaries no longer follow hex-edges in JTLS-GO 5.0.7.0, but are represented as distinct lines with latitudes and longitudes. These terrain features can be individually turned on and off using the WHIP filter capability. Thus, the need to represent rivers and national boundaries in the vector maps is eliminated. The ability to represent these features, as part of the vector map, has not been removed from the WHIP, but the user should consider whether these old vector features should or should not be displayed by the vector maps.

The output files are placed in the same directory as the input files.

2.0 ENGINEERING CHANGE PROPOSALS

This chapter summarizes model capabilities added to JTLS-GO 5.0.7.0 as a result of implementing minor Engineering Change Proposals (ECPs). No new model capabilities have been added to JTLS-GO for this release.

3.0 SOFTWARE TROUBLE REPORTS

Software Trouble Reports (STRs) describe software code errors that have been discovered by JTLS-GO users or developers and have been corrected. [Chapter 4.0](#) describes STRs that remain outstanding from previous versions.

3.1 JTLS-2017-13234 GIS Tool Export Null Pointer Exception

Selecting "Export to JTLS text format" from the File menu of the GIS Tool resulted in a null pointer exception.

Every GIS Tool project should have an xml file called MetaData.xml, located in the project directory. This file contains information about the project and various tool settings. It is automatically created when a new project is started and it is updated when the project is closed.

If the MetaData.xml exists, a ProjectInfo file is created at the time a project is opened to hold the project information from the file. However, if the MetaData.xml file is missing, no ProjectInfo is created. Access to ProjectInfo is needed when the user attempts to export or save the project. If it is never created, a null pointer exception will be thrown when the user attempts to export or save the project.

Additional code has been added to handle a missing MetaData.xml file. When a project is opened and the file is missing, the tool will now create a default ProjectInfo containing the name of the project.

3.2 JTLS-2017-13235 Ground Unit Move Task Shows Unusual Strength

A Move Task for a Ground Unit showed an unusual number of 1152 under the Strength column of the IMT Task Screen

The Strength Column for a Ground Unit Task should only be filled for the Delay Task. It was filled for all Ground Unit Tasks. For the Move Task, the displayed data field was being filled with the speed for the unit, which in the specific case mentioned was 1152 Kilometers Per Day. The code was fixed to only fill the task column held by the JODA for the Delay task

3.3 JTLS-2017-13236 CEP Crashed After Faction Side Change

The Faction Side Change Order caused a CEP crash when the Faction had previously scheduled air missions under its previous side.

The Faction Side Change code was modified to cancel any future air missions created under the faction's old side. Code for Air Missions that have already started was left unchanged.

3.4 JTLS-2017-13237 Set Air General Parameter Order Incorrect Value

The "No Intercept Available Interval" in the Set Air General Parameter Order allowed the user to select 60M for the duration. The was cause by the max value in the order being set to 60M instead of 1H. Additional during investigation, it was determined that the correct maximum duration is 365D.

The maximum value available in the order was corrected.

3.5 JTLS-2017-13238 Route Optimization Parameter Missing UOM

The Set Route Optimization Parameter order has two parameters, Minimum Half Width and Minimum End Overlap. Each of there parameters have a Unit Of Measure (UOM) of Distance. The order panel does not reflect this UOM.

The order panel was changed to include the Distance UOM for these two fields.

3.6 JTLS-2017-13239 JODA Crash While Using Find in Console

The JTLS Object Data Authority (JODA) crashed when a Controller used a console command to "find" an object by name.

The crash occurred because an object was added to the JODA with a naming problem. The JODA required that the name attribute occur as the second attribute in the list of object attributes. For this problem, associated with the new BE_OBJECT, the name attribute occurred after the second one in the list. The name was moved to the second position, in compliance with the JODA rule and the "find" capabilities in the JODA console functioned as expected.

4.0 REMAINING ERRORS

Every effort has been made to correct known model errors. All reproducible errors that resulted in CEP catastrophic software failures (crashes) have been corrected. Other corrections were prioritized and completed according to their resource cost-to-benefit relationship.

As JTLS-GO represents a major release of new functionality, remaining outstanding errors have been considered to be obsolete and no longer relevant to JTLS-GO and have been removed from consideration for correction at this time. In future maintenance releases, outstanding errors related to JTLS-GO will be listed in this chapter, with information provided regarding the extent of the error, as well as suggestions to avoid or minimize the effects of the problem.

4.1 DDSC - TMU Line Mode Changes Multiple Grids

When using the line mode in the TMU, more grids than the ones the line passes through are changed. This can also cause a warning about trying to change multiple layers to appear.

4.2 DDSC - Multiple Types In DDS History Table

If records for more than one table type are selected in the DDS History table, "History Details" will display details for only one type.

4.3 WHIP - Pipeline Not Shown On IMT

A pipeline being operated by a non-detected unit is not shown in the pipeline IMT.

4.4 DDSC/WHIP/JOBE - CADRG Map Zoom

When using the CADRG map projection, if the width of the map is less than the height the zoom tool does not work correctly.

4.5 WSM - Many Messages Cause Lockup

If a service produces a large number of log or error messages in a short period of time, it can cause the WSM to lockup.

4.6 Strategic Airlift Does Not Work

Users should not submit Strategic Airlift Orders

4.7 Tactical Ground Formation Attacks Do Not Work

Users should not submit Tactical Ground Formation Attack orders. Tactical Ground Formation moves work fine.

4.8 Materiel Handling Equipment (MHE) Does Not Work

The use of Materiel Handling Equipment (MHE) has been temporarily disabled in the model.

4.9 Port Amphibious Operations Do Not Work

Users should not submit an order to do an amphibious assault or an amphibious pickup with the Port Option. The user should simply indicate that “Beach” operations are desired or Magic Move the unit off of the formation at an appropriate time.

4.10 Multiple Point Ground Group Move Results Not Consistent

A Move order was submitted to a ground unit with a specified route consisting of three points. Four other ground units were specified as part of the group move (not a TGF move). After the lead unit completed its third Move task and the other units finished their movement, the position of the other units varied significantly from their starting locations relative to the lead unit before the first move began. The reason this happened is that when the group leader starts its move, it makes note of the relative position to each of the units in the group. Not all units were complete with their first move; therefore, the relative positions did not match the starting relative positions. To solve this problem, insure that all units have completed a previous group move before giving a second group move order.

APPENDIX A. ABBREVIATIONS AND ACRONYMS

Terms are included in this Appendix to define their usage in JTLS-GO design, functionality, and documentation.

AAA	Anti-Aircraft Artillery
AADC	Area Air Defense Commander
AAL	Air-to-Air Lethality
A/C	Aircraft
ACP	Air Control Prototype
ADA	Air Defense Artillery
AEW	Airborne Early Warning
AFB	Air Force Base
AG	Air-Ground (Air-to-Ground)
AI	Air Interdiction
AIM	Air Intercept Missile
AIREF	Air Refueling
AKL	Area Kill Lethality
AMMO	Ammunition
AO	Area of Operations
AOC	Air Operations Center
APC	Armored Personnel Carrier
ARECCE	Armed Reconnaissance
ARTE	Air Route
ARTY	Artillery
ASC	Automatic Supply Calculation
ASCII	American Standard Code for Information Interchange
ASW	Anti-Submarine Warfare
ATC	Aircraft Target Category
ATGM	Anti-Tank Guided Missile
ATK	Attack
ATO	Air Tasking Order
ATORET	Air Tasking Order Retrieve Program
ATOT	Air Tasking Order Translator
AWACS	Airborne Warning And Control System
AZ	Altitude Zone

BADGE	Bilateral Air Defense Ground Environment (used by Japan Defense Agency)
BAI	Battlefield Air Interdiction
BDA	Battle Damage Assessment
BDE	Brigade
BN	Battalion
C3	Command, Control, and Communications
C3I	Command, Control, Communications, and Intelligence
C4I	Command, Control, Communications, Computers, and Intelligence
CA	Civil Affairs
CADRG	Compressed ARC Digitized Raster Graphics
CAP	Combat Air Patrol
CAS	Close Air Support
CAT	Category
CCF	Central Control Facility
CCP	Command Control Prototype
CCU	Controller Change Unit
CEP	Combat Events Program
CMDR	Commander
COP	Common Operational Picture
CP	Combat Power
CS	Combat System
CSP	Combat System Prototype
CTAPS	Contingency Tactical Air Planning System
CTG	Commander Task Group
CTRL	Control keyboard command
DCA	Defense Counter Air
DCL	Digital Command Language
DDS	Database Development System
DEMSDB	Demonstration Standard Database
DISA	Defense Information Systems Agency
DIV	Division
DMA	Defense Mapping Agency
DoD	Department of Defense
DOS	Days of Supply

DPICM	Dual Purpose Improved Conventional Munitions
DS	Direct Support
DSA	Directed Search Area
DTG	Date Time Group
EC	Electronic Combat
ECM	Electronic Counter Measure
ECP	Engineering Change Proposal
EEL	Essential Elements of Information
ELINT	Electronic Intelligence
ELS	Entity Level Server
EODA	Entity Level JTLS Object Data Authority
ETA	Estimated Time of Arrival
FARP	Forward Arming and Refueling Point
FLP	Fire Lethality Prototype
FLOT	Forward Location of Troops
FOL	Forward Operating Location
FWL	Frederick W. Lanchester (originated a differential equation model of attrition)
GAL	Gallon
GCCS	Global Command and Control System
GRTE	Ground Route
GS	General Support
GSR	General Support Reinforcing
GUI	Graphical User Interface
HARM	High-speed Anti-radiation Missile
HE	High Explosive
HELO	Helicopter
HMMWV	High Mobility Multipurpose Wheeled Vehicle
HQ	Headquarters
HRU	High Resolution Unit
HTML	Hypertext Markup Language
HTT	High resolution unit Target Type
HUP	High resolution Unit Prototype
ICM	Improved Conventional Munitions
ICP	Interface Configuration Program

ICPLogin	Interface Login Program
ID	Identifier
IFF	Identification Friend or Foe
IIP	Intelligence Information Prototype
IMT	Information Management Tool
INFO	Information
INTEL	Intelligence
JCATS	Joint Conflict And Tactical Simulation
JDA	Japan Defense Agency
JDPI	Joint Desired Point of Impact (formerly DMPI: Desired Mean Point of Impact)
JDS	JTLS Data System
JDSP	JTLS Data System Protocol
JEDI	JODA Entity Data Identifier
JMCIS	Joint Maritime Combat Information System
JMEM	Joint Munitions Effectiveness Manuals
JODA	JTLS Object Distribution Authority
JOI	JTLS Operational Interface
JPL	Jet Propulsion Laboratory
JRSG	Joint Rapid Scenario Generation (formerly JIDPS: Joint Integrated Database Preparation System)
JSDF	Japanese Self-Defense Force
JTLS	Joint Theater Level Simulation
JTLS-GO	Joint Theater Level Simulation - Global Operations
JTOI	JTLS Transaction Operational Interface
JXSR	JTLS XML Serial Repository
KIA	Killed In Action
KM	Kilometer
KNOTS	Nautical miles per hour
LA	Lethal Area
LAN	Local Area Network
LAT	Latitude
LB	Login Build (JTLS order type)
LDAP	Lightweight Directory Access Protocol
LDT	Lanchester coefficient Development Tool
LOG	Logistics

LOGIN	Logistics Input
LOGREP	Logistics Report
LONG	Longitude
LOTS	Logistics Over The Shore
LR	Long Range
M&S	Modeling and Simulation
MAPP	Modern Aids to Planning Program
MB	Megabyte
MCP	Mobility Counter-mobility Prototype
MCR	Model Change Request
MG	Machine Gun
MHE	Material Handling Equipment
MIP	Model Interface Program
MOGAS	Motor Gasoline
MOPP	Mission-Oriented Protective Posture
MOSAIC	NCSA user interface software
MOTIF	X Window System graphical interface
MP	Maneuver Prototype
MPP	Message Processor Program
MSC	Major Subordinate Command
MSG	Message
MTF	Message Text Formats
MUREP	Munitions Report
MUSE	Multiple Unified Simulation Environment
NCSA	National Center for Supercomputing Applications (University of Illinois)
NEO	Noncombatant Evacuation Operations
NFS	Network File Server
NGO	Non-Governmental Organization
NIS	Network Information Service or Network Information System
NM	Nautical Mile
NTSC	Naval Telecommunications System Center
OAS	Offensive Air Support
OBS	Order of Battle Service (formerly UGU: Unit Generation Utility)
OCA	Offensive Counter-Air

OJCS	Organization of the Joint Chiefs of Staff
OMA	Order Management Authority
ONC	Operational Navigation Chart
OPM	Online Player Manual
OPP	Order Preprocessing Program
OTH	Over The Horizon
OTH Gold	Over The Horizon message specification
OTH-T	Over The Horizon-Targeting
pD	Probability of Detection
pE	Probability of Engage
pH	Probability of Hit
pK	Probability of Kill
PKL	Point Kill Lethality
POL	Petroleum, Oil, and Lubricants
POSIX	International operating system standard based on System V and BSD
PPS	Postprocessor System
PSYOPS	Psychological Operations
RAM	Random Access Memory
RDMS	Relational Database Management System
RECCE	Reconnaissance (air missions)
RECON	Reconnaissance (ground missions)
REGT	Regiment
RNS	Random Number Seed
ROE	Rules Of Engagement
RPT	Report
RSP	Reformat Spreadsheet Program
SAL	Surface-to-Air Lethality
SAM	Surface-to-Air Missile
SAM/AAA	Surface-to-Air Missile/Anti-Aircraft Artillery
SC	Supply Category
SCP	Simulation Control Plan
SDB	Standard Database
SEAD	Suppression of Enemy Air Defense
SIMSCRIPT	Simulation programming language (product of CACI, Inc.)

SIP	Scenario Initialization Program
SITREP	Situation Report
SLP	Sustainment Log Prototype
SOF	Special Operations Forces
SP	Survivability Prototype
SQL	Structured Query Language
SR	Short Range
SRP	Start/Restart Program (a JTLS component)
SRTE	Sea Route
SSM	Surface-to-Surface Missile
STR	Software Trouble Report
SUP	Ship Unit Prototype
SVP	Scenario Verification Program
SYNAPSE	Synchronized Authentication and Preferences Service
TACELINT	Tactical Electronic Intelligence
TADIL	Tactical Digital Interface Link
TCP/IP	Transmission Control Protocol/Internet Protocol
TEL	Transporter Erector Launcher
TG	Target entity attribute prefix
TGS	Terrain Generation Service (formerly TPS:Terrain Preparation System)
TGT	Target
TMU	Terrain Modification Utility
TOE	Table of Organization and Equipment
TOT	Time Over Target
TOW	Tube-launched Optically-tracked Wire-guided missile
TPFDD	Time-Phased Force Deployment Data
TTG	Target Type Group
TTL	Target Types List
TUP	Tactical Unit Prototype
TW	Targetable Weapon
UBL	Unit Basic Load
UIM/X	GUI builder tool
UNIX	POSIX-compliant operating system
UNK	Unknown

UOM	Unit Of Measure
USA	United States Army (U.S. and U.S.A. refer to United States and United States of America)
USAF	United States Air Force
USCG	United States Coast Guard
USMC	United States Marine Corps
USMTF	United States Message Text Format
USN	United States Navy
UT	Unit entity attribute prefix
UTM	Universal Transverse Mercator
VIFRED	Visual Forms Editor
VMS	Virtual Memory System
VTOL	Vertical Take-Off and Landing aircraft
WAN	Wide Area Network
WDRAW	Withdraw
WEJ	Web Enabled JTLS
WHIP	Web Hosted Interface Program
WIA	Wounded In Action
WPC	Warrior Preparation Center
WPN	Weapon
WT	Weight
WW	Wild Weasel
XMS	XML Message Service

APPENDIX B. Version 5.0.7.0 STANDARD DATABASE CHANGES

No new changes were made to the Standard Database (SDB) for this maintenance release.

APPENDIX C. Version 5.0.7.0 DATABASE CHANGES

No changes were made to the JTLS-GO 5.0.7.0 database for this maintenance release.